



VHF AND UHF TRANSCEIVERS

IC-F5062D

(IDAS digital VHF transceiver)

IC-F5062

(VHF transceiver)

IC-F6062D

(IDAS digital UHF transceiver)

IC-F6062

(UHF transceiver)



Analogue

IDAS™ dPMR™

IDAS™ NXDN™

512 ch/
128 zones

Conventional/
BISS 1200 mode

IDAS™ dPMR™
IDAS™ NXDN™

2-Tone, 5-Tone
CTCSS, DTCS

25W Output

IP54
(Controller only)

Full dot-matrix
LCD

IDAS™

ICOM DIGITAL ADVANCED SYSTEM



Analogue/Digital Multi-Mode Professional Mobile

* With IC-F5062D/IC-F6062D "D" version.

VHF TRANSCEIVERS 25W

IC-F5062/D

UHF TRANSCEIVERS 25W

IC-F6062/D



The above photo includes optional separation kit, RMK-3, and separation cable, OPC-609.



Detachable front panel

With the optional remote control kit, RMK-3 and separation cable, the front panel of the radio can be detached from the main unit. It allows you flexible installation even in limited installation space.

Dot matrix, multi-function LCD

With a high contrast dot matrix display, upper and lower case characters can be easily distinguished. You can change the display setting to show one line and 12 characters, or two lines and 24 characters via programming. LCD backlighting is useful for night time operation.



Two line setting display example.

Front mounted speaker

4 watts (typ.) front mounted speaker delivers clear and loud audio. The built-in audio compander improves the signal to noise ratio.

IP54 dust-protection and splash resistance (Controller only)

The rugged die-cast chassis and polycarbonate front panel are resistant to shock and vibration. When used with the optional separation kit, the remote control head has dust-protection and splash resistant construction, equivalent to IP54.

Wide frequency range and large channel capacity

The IC-F5062/D series covers a wide frequency range in one version (VHF 136–174 MHz, UHF 400–470MHz). The 512 memory channel capacity with 128 zones allows you to divide and store a variety of flexible channel groupings. Wide, middle and narrow channel bandwidth (25/20/12.5kHz)* is also programmable.

* Programmable 25/12.5kHz or 20/12.5kHz.

Multiple 2-Tone, 5-Tone signalings

The built-in 2-Tone and 5-Tone capabilities allow you to send a tone code with your call and decode multiple tone codes on a channel. 40 pairs of CTCSS/DTCS memory channels are also available.

BIIS 1200 compatible

The following selective calling and data features are available with the built-in BIIS system.

- 32 abbreviated call memories
- 7 group IDs
- 24-status Messages
- Send 12-character SDM (Short Data Message)
- Receive up to 95 characters of text

Voting operation

The voting mode scanning detects the signal strength level of repeater stations and automatically selects the strongest station, useful for roaming between 2 or more repeater sites. Once you program the voting mode to a memory zone, you can easily start voting mode operation by changing the zone setting.

Mode dependent scan

In the normal mode scan, you can select a scanning list independent to the channel setting. In the mode dependent setting, the scanning list is automatically selected according to the operating channel. It is convenient when you change operating channels or move to a different operating area, you don't need to change the scanning setting.

Built-in inversion-type voice scrambler

The built-in inversion type voice scrambler provides secure conversation. When a more secure system is required, the 32

code non-rolling-type voice scrambler UT-109R and 1020 code rolling type UT-110R are available as an option.

* Inversion type voice scrambler is not compatible with UT-109R/UT-110R voice scrambler.

D-sub accessory connector

The IC-F5062/D series has a D-SUB 25 pin ACC connector for connecting various external devices.



Other features

- 8 DTMF autodial memories
- Optional heavy duty, dynamic microphone HM-148
- Power on password
- Radio stun, kill and revive functions disable or re-enable a lost or stolen unit over the air
- Busy repeater lockout function
- Surveillance function temporarily turns off the LED backlight and beep sound
- Convenient key assign stickers
- Microphone hanger action programmable
- Ignition sensing line
- Built-in basic LTR™ trunking and MDC 1200 capability* (* Depending on version)
- The IC-F3162/D, F4162/D series is the handheld equivalent model
- Escalating alarm
- Lone worker function
- Advanced scanning functions including Tx channel, talk back and nuisance delete and more...

IDAS digital mode ready

IDAS (Icom Digital Advanced System) is Icom's digital land mobile system using the 6.25kHz narrowband FDMA technology. IDAS has choice of an NXDN™ protocol or an ETSI dPMR™ protocol. See the IDAS brochure for details.



SPECIFICATIONS

	IC-F5062D/IC-F5062	IC-F6062D/IC-F6062
GENERAL		
Frequency coverage	136–174MHz	400–470MHz
Number of channels	Max 512 channels /128 zones	
Type of emission	16K0F3E, 14K0F3E, 8K50F3E, 4K00F1E/F1D	
Channel spacing	25/20/12.5kHz,	
	6.25kHz (Digital)	
PLL channel step	2.5/3.125kHz	
Power supply requirement	13.2V DC	
Current drain (approx.)	Tx 25W 7A	
	Rx Max. audio 1200mA	
	Standby 300mA	
Antenna impedance	50Ω (SO-239)	
Operating temperature range	–25°C to +55°C	
Dimensions (W×H×D) (Projections not included)	160×45×150mm	
Weight (approx.)	1.3kg	
TRANSMITTER		
Output power (at 13.2V DC)	25W, 10W, 2.5W (Hi, L2, L1)	
Max. frequency deviation	±5.0kHz/±4.0kHz/±2.5kHz (W/M/N)	
Frequency stability	±1.5kHz	
Spurious emissions	0.25μW (≤1GHz)	
	1.0μW (>1GHz)	
Audio harmonic distortion	3% typ. (AF 1kHz 40% deviation)	
FSK error	5% Max. (Digital)	
Ext. microphone impedance	600Ω (8-pin modular)	
RECEIVER		
Sensitivity (at 20dB SINAD) (at 5% BER)	–4dBμV typ. (emf)	
	–8dBμV typ. (emf)	
Adjacent channel selectivity	85/83/75dB typ. (W/M/N)	
Spurious response rejection	90dB typ.	
Intermodulation	70dB typ.	
Audio output power	4W typ. (at 5% distortion, 4Ω load)	
Ext. speaker connector	2-conductor 3.5 (d) mm (1/8")/4Ω	

Measurements made in accordance with EN 300-086.
All stated specifications are subject to change without notice or obligation.

Supplied Accessories

- Hand microphone (HM-152)
- DC power cable
- Mounting bracket kit
- Microphone hanger
- Key assign stickers

VERSION COMPARISON

	IC-F5062D IC-F6062D (IDAS dPMR version)	IC-F5062D IC-F6062D (IDAS NXDN version)	IC-F5062 IC-F6062 (FM version)
CTCSS/DTCS (Analogue)	✓	✓	✓
5-Tone enc/dec (Analogue)	✓	✓	✓
2-Tone enc/dec (Analogue)	✓	✓	✓
DTMF autodial (Analogue)	✓	✓	✓
DTMF decoder (Analogue)	✓	✓	✓
BIIS 1200 (Analogue)	✓	✓	✓
MDC 1200 (Analogue)	–	✓	✓
LTR trunking (Analogue)	–	✓	✓
Voice scrambler (Analogue)			
Inversion	✓	✓	✓
Non-Rolling	UT-109R	UT-109R	UT-109R
Rolling	UT-110R	UT-110R	UT-110R
IDAS dPMR			
Tier 2 Mode 1/2	✓	–	–
Tier 2 Mode 3	✓	–	–
IDAS NXDN			
Conventional mode	–	✓*	UT-126H
Single-site type D trunking	–	✓*	UT-126H
Multi-site type D trunking	–	✓*	UT-126H

* UT-126H is already installed in the IDAS NXDN version.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain Blowing/Drip*	506.4	I, III
Humidity	507.4	–
Salt Fog	509.4	–
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard

Dust & Water*	IP54 (Dust-protection and water resistant)
---------------	--

* Rain blowing, drip and IP54 tests were performed on the controller and RMK-3 only.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

HAND MICROPHONES



**SEPARATION KIT
RMK-3**



SEPARATION CABLES

One of the separation cables is required for use with the RMK-3.




**DESKTOP MICROPHONE
SM-26**



EXTERNAL SPEAKERS



INTERNAL UNITS

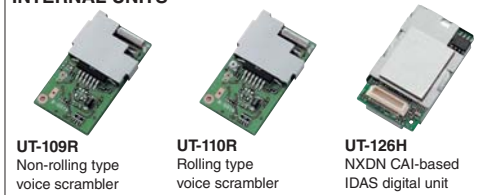

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. IDAS, IDAS logo are trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and Kenwood Corporation. dPMR and the dPMR logo are trademarks of the dPMR MoU Association. LTR is a trademark of E.F. Johnson Company. All other trademarks are the properties of their respective holders.

Icom Inc.

1-132, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Icom (UK) Ltd.

Blacksloe House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

Icom Canada

Greenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejone des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Beijing Icom Ltd.

10C07 Long Silver Mansion, No.88,
Yong Ding Road, Haidian District,
Beijing, 100039, China
Phone: +86 (010) 5889 5391/5392/5393
Fax: +86 (010) 5889 5395
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Baños A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone: +48 (58) 550 7135
Fax: +48 (58) 551 0484
E-mail: icompolksa@icompolksa.com.pl
URL: <http://www.icompolksa.com.pl>